




Heyco® Shorty Plugs

- Limited intrusion (1/8" or 3,2 mm) inside the panel.
- Multiple sizes total for mounting holes from .218" (5,5 mm) to 1.093" (27,8 mm).
- Locks firmly in panel up to .062" (1,6 mm) thick.
- Quick and easy installation.

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	
.062	1,6	.218	5,5	1654	1655	SP-218	.281	7,1	.25	6,4
.062	1,6	.281	7,1	1660	1661	SP-281	.343	8,7	.25	6,4
.062	1,6	.312	7,9	1678	1679	SP-312	.375	9,5	.25	6,4
.062	1,6	.343	8,7	1663	1664	SP-343	.406	10,3	.25	6,4
.062	1,6	.375	9,5	1681	1682	SP-375	.468	11,9	.25	6,4
.062	1,6	.406	10,3	1666	1667	SP-406	.468	11,9	.25	6,4
.062	1,6	.437	11,1	1684	1685	SP-437	.531	13,5	.25	6,4
.062	1,6	.468	11,9	1669	1670	SP-468	.531	13,5	.25	6,4
.062	1,6	.500	12,7	1687	1688	SP-500	.563	14,3	.25	6,4
.062	1,6	.531	13,5	1672	1673	SP-531	.593	15,1	.25	6,4
.062	1,6	.593	15,1	1675	1676	SP-593	.687	17,5	.25	6,4
.062	1,6	.625	15,9	1690	1691	SP-625	.718	18,3	.25	6,4
.062	1,6	.750	19,0	1693	1694	SP-750	.843	21,4	.25	6,4
.062	1,6	.781	19,8	1696	1697	SP-781	.890	22,6	.25	6,4
.062	1,6	.875	22,2	1699	1700	SP-875	.968	24,6	.25	6,4
.062	1,6	1.000	25,4	1702	1703	SP-1000	1.200	30,5	.25	6,4
NEW!	.062	1,6	1.093	1705	1706	SP-1093	1.219	31,0	.25	6,4

Standard colors black and white. Consult Heyco for other colors.
Approximate Head Thickness: .063" (1,6 mm).

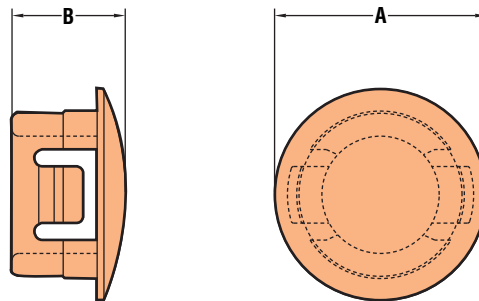

Quick Specs

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E51579 Certified by the Canadian Standards Association File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)